

MINIMUS MINIMUS+

SMART SEISMIC DIGITISER WITH ADVANCED DATA-PROCESSING CAPABILITY AND SOFTWARE COMMUNICATIONS



Compact and low-power smart seismic digitiser with the option of four or eight primary digitisation channels.

KEY FEATURES

- > Advanced software communications for quick and easy instrument and data management
- > Hot-swappable and dual-redundant microSD storage
- > Select from GNSS (GPS, GLONASS, BeiDou) or PTP timing sources
- NEW**
- > Enhanced features with firmware release 2.0 see page 3

FOR EARLY WARNING APPLICATIONS:

- > Ultra low-latency capability
- > Multi-instrument voting for mitigating false-positive alerts
- > Reduce telemetry load by streaming only derived values at trigger
- > Common Alert Protocol (CAP) enabled for automated emergency warning

Minimus

The Güralp Minimus (four channel) and Minimus+ (eight channel) are advanced 'smart' seismic digitisers, packed with a host of features that make them the ideal plug and play solution for rapid deployments and multi-scale networked arrays.

ENCASED IN AN ENVIRONMENTALLY SEALED, HARD ANODISED ALUMINUM CASING TO WITHSTAND THE HARSHTEST OF ENVIRONMENTS, THE MINIMUS AND MINIMUS+ HAVE AN INTERNAL THERMOMETER AND A HUMIDITY SENSOR TO ALERT YOU TO ANY MOISTURE INGRESS.

MINIMUS DIMENSIONS:



MINIMUS+ DIMENSIONS:



Multidisciplinary functionality with simple instrument and data management.

The four channel Minimus can simultaneously accommodate a triaxial analogue sensor, an auxiliary input e.g. for infrasound; a Radian posthole; plus its own internal MEMS accelerometer (2g).

The eight channel Minimus+ accommodates all of the above plus an additional triaxial analogue seismic sensor and auxiliary input.

Integrated network connectivity allows the Minimus to be controlled remotely using Güralp Discovery, our software platform, or via a standard web browser. Discovery allows the user to identify the instrument IP address via a Cloud registry server or data centre, eliminating the need for static IP addresses.

Discovery also allows for simpler instrument and data management with access to hardware State-of-Health (SoH); data streaming; GNSS location; instrument response and calibration values.

For added confidence during deployments, GüVü, a Bluetooth App, displays waveforms, orientation, temperature and humidity data, for instant checking of installation integrity.

Key features

24-bit, four channel (Minimus) or eight channel (Minimus+) digitiser

Compatible with any analogue seismic sensor

Ultra-low-latency mode for Earthquake Early Warning - when used with GDI protocol, transmission can be achieved in 40 ms

Industry standard triggering algorithms for EEW (STA/LTA and Threshold)

Multi-instrument voting for mitigating false positive alerts

NEW Powerful real-time data Transforms: mathematical operations applied to real-time and recorded data e.g. integration; differentiation; high and low-pass filters

NEW Quick Seismic Characteristic Data (QSCD) protocol and Maximum, Minimus and Average (MMA) calculated on selected time window.

Seismic event table displaying events detected using trigger algorithms with links to download event data (pre and post event time is user-configurable)

Common Alert Protocol (CAP) enabled for automated emergency warning

Identification of IP address via Discovery and Cloud registry server

Remote instrument and data management via easy-to-use Discovery software

Scream!™ compatible

GüVü Bluetooth App for installation integrity checking available for both Android and iOS devices

Versatile streaming and filtering options.

Users can select sample rates of up to 5000 samples per second with the option to simultaneously stream multiple sample rates in addition to two recording rates.

Data are locally recorded in miniSEED (with metadata stored in dataless SEED format) and can be streamed in realtime using GCF (Scream!), GDI-link and SEEDlink.

NEW

The latest firmware update also delivers enhanced real-time data manipulation tools such as Quick Seismic Characteristic Data (QSCD); Maximum, Minimum and Average (MMA) calculations and transforms such as integration, differentiation and low and high pass filters.

For Earthquake Early Warning applications, the Minimus has an ultra-low-latency mode running causal filters alongside traditional acausal filters. When used with our GDI protocol, this low-latency mode means network transmission can be achieved in 40 milliseconds (sample rate and network dependent). Other EEW features include industry standard triggering algorithms for EEW (STA/LTA and Threshold); multi-instrument voting for mitigating false positive alerts; and Common Alert Protocol (CAP) for automated emergency warning.

Dual redundant 64 GB microSD cards (1 fixed, 1 hot-swappable)

Select from GNSS (GPS, GLONASS or BeiDou) or PTP (Precision Time Protocol) timing sources

Minimus+ supports Power Over Ethernet (POE) which significantly reduces complexity when installing local arrays

Applications

- > Earthquake Early Warning Systems
- > Volcanology
- > Multi-scale seismic networks
- > Structural health monitoring
- > Hydrocarbon exploration
- > Permanent reservoir monitoring
- > Induced seismicity detection
- > Explosion monitoring

Minimus: Güralp Discovery Software*

*See Discovery datasheet for more details

Discovery dramatically simplifies instrument and data management and gives users powerful tools via a web interface:

- > Identify instrument IP address
- > Analysis of hardware State of Health
- > Data streaming control
- > Remotely upgrade digitiser firmware
- > Upload configuration to multiple units simultaneously
- > Advanced analysis on waveform data such as PSD and spectrogram

Güralp Systems - Discovery

File Edit View Help

	Status	Label	System	Name	Serial#	Firmware Ver	WAN Address	LAN Address	Uptime	Last Contact	Latit ^
24		DEMO 83	Minimus	MIN-C456	50262	1.1-1022	89.213.16.113	10.10.0.36	1 days 18 Hrs	Just Now	0.000
25		NO LABEL	Minimus	MIN-D956	55638	1.1-1022	89.213.16.113	10.30.0.81	16:57:58	Just Now	0.000
26		NO LABEL	Minimus	MIN-1F58	8024	1.1-1022	89.213.16.113	10.20.0.168	23:40:08	Just Now	51.36
27		NO LABEL	Minimus	MIN-2B57	11095	1.1-1022	89.213.16.113	10.30.0.87	6 days 17 Hrs	Just Now	0.000
28		NO LABEL	Minimus	MIN-2A58	10840	1.1-1022	89.213.16.113	10.20.0.50	17:48:29	Just Now	51.36
29		NO LABEL	Minimus	MIN-2B58	11096	1.1-1022	89.213.16.113	10.20.0.64	17:34:48	Just Now	51.36
30		NO LABEL	Minimus	MIN-2C58	11352	1.1-1022	89.213.16.113	10.20.0.67	17:35:48	Just Now	51.36
31		NO LABEL	Minimus	MIN-2D58	11608	1.1-1022	89.213.16.113	10.20.0.67	17:35:48	Just Now	51.36

— NETWORK OVERVIEW

DIGITISER WEB INTERFACE —

Status Network **Setup** Power Trigger Data Flow Data Record

System type: Minimus | Host label: NO LABEL | Host name: MIN-C555 (10.10.0.13) | Serial number: 50517

Digitiser Config Please reboot

Date: Mon 04 Dec 2017 Time: 3:02:49 PM Auto Refresh

Label: NO LABEL Station Name: TEST Network Code

Bluetooth PIN: 0000 Filter quality: High

Deploy mode: Normal Deploy

Applied Rotation

Analogue 0: 0° Radian 1: 0° Radian 2: 0° Radian 3: 0° Radian 4: 0° Radian 5: 0° Radian 6: 0° Radian 7: 0°

Reboot

Analogue Sensor

Input Gain: Unity Sensor Type: Fortis

Status Network Setup **Power** Trigger Data Flow Data Record Storage Logout Help

System type: Minimus | Host label: Support | Host name: MIN-C555 (10.10.0.13) | Serial number: 50517

System Status

General Information	
Host name	MIN-C555
Serial number	c555
Digitiser temperature	30.1°C
GNSS connection status	Connected
Last lock time	2017-11-29 07:00:48
Latitude	51.3607
Altitude	121.50 m
GNSS PPS status	Tracked
GNSS Lock state	2D locked
microSD status	Recording
Number of sensors detected	1

Support	
System type	Minimus
Firmware version	1.1-1022
IPv4 address	10.10.0.13 (DHCP)
Input voltage	12.751 V
Power over Ethernet voltage	0.735 V



GNSS Status	
Last timestamp	2017-11-29 10:22:39
GNSS stability	Good
Longitude	-1.1631
Horizontal dilution of precision	0.78
GNSS NMEA stream	Input OK
Used	12
In view	13

Data record status	
microSD total	60817488 KB
microSD used	5726340 KB
microSD free	55091148 KB

Sensors	
Serial number (0)	c555
Firmware ver (0)	3.11
Sensometer Z (0)	22759
Sensometer N (0)	-4950
Sensometer E (0)	-10945

— DIGITISER CONFIGURATION

REAL-TIME VIEWER —

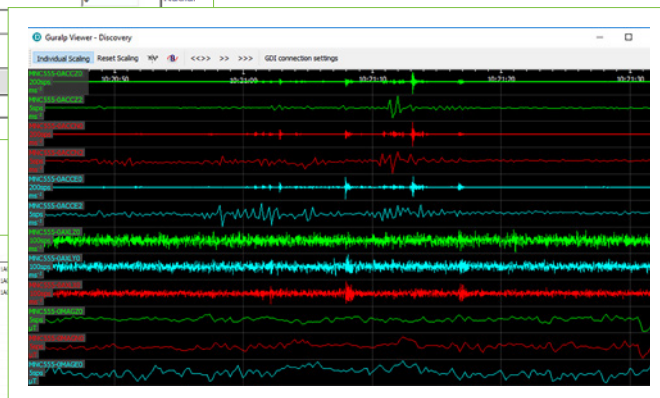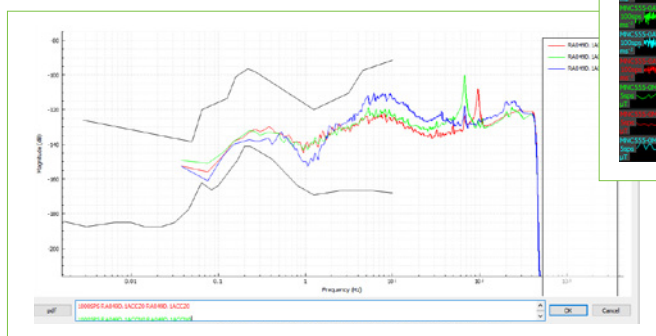

— INSTRUMENT POWER SPECTRAL DENSITY (PSD) GRAPHS

Minimus: GüVü Bluetooth App

Check the integrity of your installation instantaneously

GüVü displays a range of instrument data such as waveforms, orientation, temperature and humidity data. Additionally you can lock/unlock and centre the masses of analogue sensors, reboot Minimus and alter sample rates without instrument disturbance. GüVü can also format replacement SD cards. A deployment status report can then be emailed for a detailed record of the installation.



Minimus Minimus+

SPECIFICATIONS



SENSOR INPUTS

Primary digitisation channels	Minimus: four at 24 bits Minimus+: eight at 24 bits Differential input: 40 V peak-to-peak (± 20 V). Also compatible with single-ended inputs: 20 V peak-to-peak (± 10 V)
Secondary channels	Minimus: three analogue channels for sensor mass positions, one internal calibration channel Minimus+: six analogue channels for sensor mass positions, two internal calibration channels
Internal environmental channels	Humidity Temperature Supply voltage MEMS accelerometer (three component) Magnetometer (three component)
Input impedance	50 k Ω

PERFORMANCE

ADC converter type	Delta-sigma
ADC conversion delay	6 μ s
Output format	32-bit
Dynamic Range	>142 dB at 100 samples per second
Gain drift	3 ppm / °C
Common-mode rejection	>110 dB

DATA PROCESSING

Output rates available	1 sample per hour up to 5000 samples per second for primary channels, user-selectable Up to 500 samples per second for environmental channels
Decimation filters	± 2 , ± 3 , ± 4 , ± 5 decimation (Causal / Acausal)
Out-of-band rejection	>194 dB
Data transmission mode	Continuous
Triggered data	Retrievable using event table in digitiser's web page. User selectable pre and post event time.
Trigger modes	STA/LTA, Threshold
Selectable gain	Unity, $\times 2$, $\times 4$, $\times 8$, $\times 12$

TIMING AND CALIBRATION

Timing source precision	Accuracy when GNSS locked ± 50 ns. Typical drift when unsynchronised (without GNSS) <1 ms per day
Timing sources	GNSS (GPS, GLONASS, BeiDou), PTP (Precision Time Protocol)
Calibration signal generator	Triangle, Step or Broadband noise with adjustable amplitude.

OPERATION AND POWER USAGE

Operating temperature	-20 to +60 °C
Relative humidity range	zero to 100 %
Power supply	10 - 36 V DC* Optional 9 V DC available
Power consumption at 12 V DC (Minimus)	< 1 W in power save mode with no GNSS or Ethernet < 1.65 W in standard mode with GNSS and 10 Mb/s Ethernet output
Power consumption at 12 V DC (Minimus+)	< 1.1 W in power save mode with no GNSS or Ethernet < 1.75 W in standard mode with GNSS and 10 Mb/s Ethernet output

*Power voltage for operation of this unit only. Connection to additional instrumentation or use of longer cables may result in a higher input voltage requirement.

SOFTWARE

Operating system	Windows, Linux and macOS compatible
Communication technologies supported Minimus and Minimus+:	Ethernet (10/100/1000BASE-T)
Minimus+ only:	Power over Ethernet (PoE)

USER INTERFACE

Configuration and control	(Ethernet) Güralp Discovery - free download, web browser interface. GüVü app (Bluetooth) available for both Android and iOS devices
---------------------------	---

DATA COMMUNICATION

Data recording formats	miniSEED (metadata stored in dataless SEED format)
Data streaming protocols (via Ethernet)	GCF (Scream!) and GDI-link (metadata sent in RESP / dataless SEED file formats), SEEDlink
Memory and storage	Dual redundant 64 GB microSD cards (1 fixed, 1 hot-swappable)

PHYSICAL CHARACTERISTICS

Casing type	Environmentally sealed, hard anodised aluminium
Environmental sensor	Humidity and temperature
Weight	Minimus: 674 g (disconnected) Minimus+: 782 g (disconnected)
Dimensions	Minimus: 134 mm \times 99 mm \times 45 mm Minimus+: 134 mm \times 139 mm \times 45 mm
Connector type	MIL-DTL-26482 Series 1: Analogue - 26 way (Minimus $\times 1$; Minimus+ $\times 2$) Ethernet - 8P8C (RJ45) Power - 4 pin Digital - 10 pin LEMO : GNSS/serial - 14 pin
Global navigation satellite system (GNSS)	Compact, encapsulated, waterproof, precision timing GPS/GLONASS/BeiDou receiver
Environmental protection	IP68 - protection against effects of prolonged immersion at 3 m depth for 72 hours

Güralp Systems Limited
Midas House
Calleva Park
Aldermaston
Reading
RG7 8EA
United Kingdom

T +44 118 981 9056
F +44 118 981 9943
E sales@guralp.com

www.guralp.com

In the interests of continual improvement with respect to design, reliability, function or otherwise, all product specifications and data are subject to change without prior notice.

DAS-MIN-0001 Issue J